


### HOMESTEAD AT BRYAN FARM

CZ-MP-23-04


Town of Garner



# Garner Forward: Character Typology

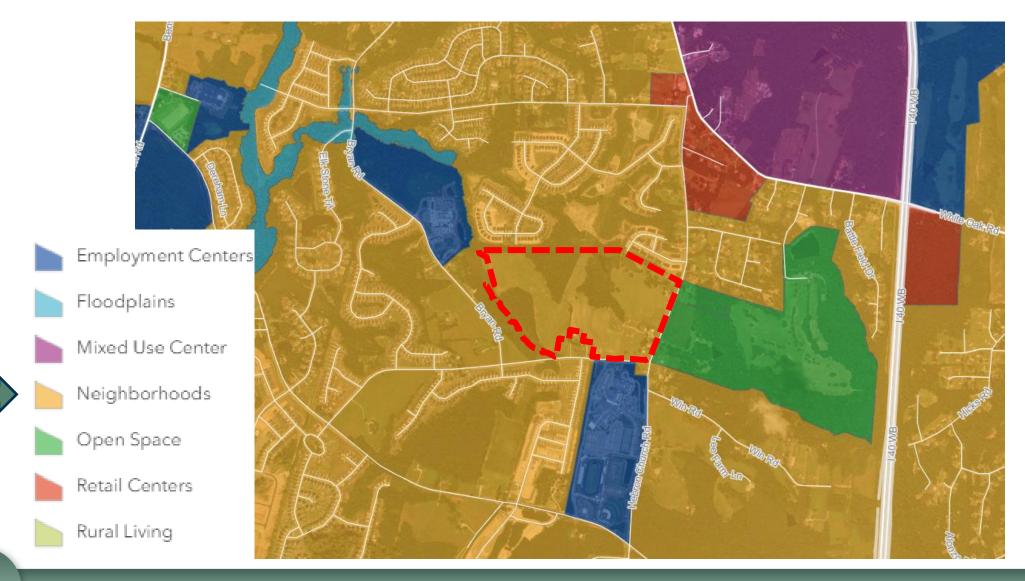

## Garner Forward: Development Intensity

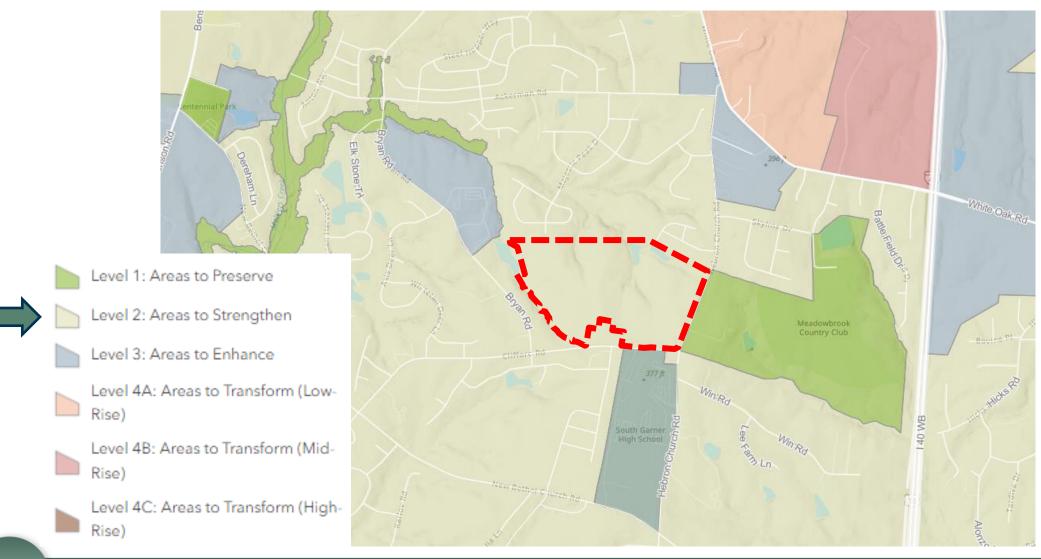





IMPROVED PARK SPACE





IMPROVED PARK SPACE

# **Updates During Council Hearings**

- Reduced density by 50 units (310 to 260 units)
  - Eliminated flexibility in final unit count
- Flipped ratio of townhome to single family detached
  - Previous plan: 70% townhomes (203) to 30% SFD (88)
  - Updated plan: 39% townhomes (102) to 61% SFD (158)
- Enhanced architectural conditions
- Enhanced greenway and sidewalk network
- Enhanced open space and amenity commitments

## **Zoning Conditions**

- Permitted uses: single family & townhouse
- Max of 310 260 units
- HOA required
- Contribution to White Oak/Bryan Road corridor improvements
- Black aluminum picket fencing shall be provided around wet pond SCMs
- Amenities:
  - Main amenity shall begin construction upon receiving first CO for homes in Phase 1 and will be constructed within 18 months:
    - Pool (min 1,500 square feet), Cabana (min 800 square feet)
  - Each pocket park shall contain at least two of the following: benches, shade structure, playground, dog park, or paved walking trail
  - Minimum of 1 dog park required
  - Minimum of 1 playground required
  - Two play lawns with minimum 10,000 square feet area, <u>bounded loosely by landscaping and/or</u>
     <u>hardscaping features such as trees, shrubs, benches, decorative fence sections, sidewalks, trails, or <u>similar</u>
    </u>

#### **Architectural Conditions**

- Vinyl siding and soffit prohibited (vinyl trim and decorative details permitted).
- All units shall have 2-car garage or 1-car garage with minimum size of 12 feet x 20 feet.
- All slab foundations with an exposed height of greater than 12 inches shall be finished with masonry product. This applies to front and side elevations with right of way frontage.
- All slab foundations with an exposed height of 12 inches or less shall be textured with parging. This applies to front and side elevations.
- All homes shall have a minimum 12-inch eaves on all sides.
- A covered front porch (minimum 20 square feet 5' x 5') is required on all dwelling units. All entry areas must include 1 of the following: sidelights, transom windows, craftsman style paneling, glazing in the door.
- An outdoor deck, porch, or patio (minimum of 80 square feet) is required on all dwelling units. If a porch is chosen, it may be an enlargement of the porch required by the preceding condition and this condition does not require two porches.
- Any non-decorative front porch columns and/or pilasters shall be a minimum of 6" in dimension (width and/or depth).

  Decorative columns with variable dimensions may be less than 6" in width or depth.

#### **Architectural Conditions**

- Any cantilevered projection shall have cosmetic brackets or shelf supports directly underneath them.
- All dwelling units shall have at least 1 window per habitable floor on each side elevation (excluding interior townhomes).
- Shutters or 1x4 window trim shall be provided on the front façade of all dwelling units and side facades of all townhome dwellings with right of way frontage. All windows within a street facing facade face utilizing siding materials shall either be set in full trim at least equivalent to 1x4 board or feature decorative sills and pediments. All windows within elevations clad in brick or stone shall include masonry or decorative sill and lintels.
- All windows of a dwelling unit, with exception to accent windows and bay windows, shall feature a common muntin pattern.
- Garage doors shall have windows and decorative hardware. A minimum of two garage window styles and two
  garage hardware styles shall be included in the development.
- A decorative light fixture (minimum 6 inch wide and 12 inch tall) shall be included on all garage door facades.
- Articulation of the front facades of townhomes and/or an offset between units shall be provided to avoid flat building faces. There shall be a minimum 2' front façade and 2' rear façade offset after every two units within a townhouse building.
- Attached Dwelling Units (Townhouses) in a building with a pitched roof shall feature a break in the front facing slope or roof peak (such as a gable, dormer, chimney, cupola, etc.). A minimum of 2 breaks for buildings of 4 units or less. A minimum of 3 breaks for buildings of 5 units or more.







