


CONCRETE DEPTH	
RAMP / FLARE	6"
LANDING	4"

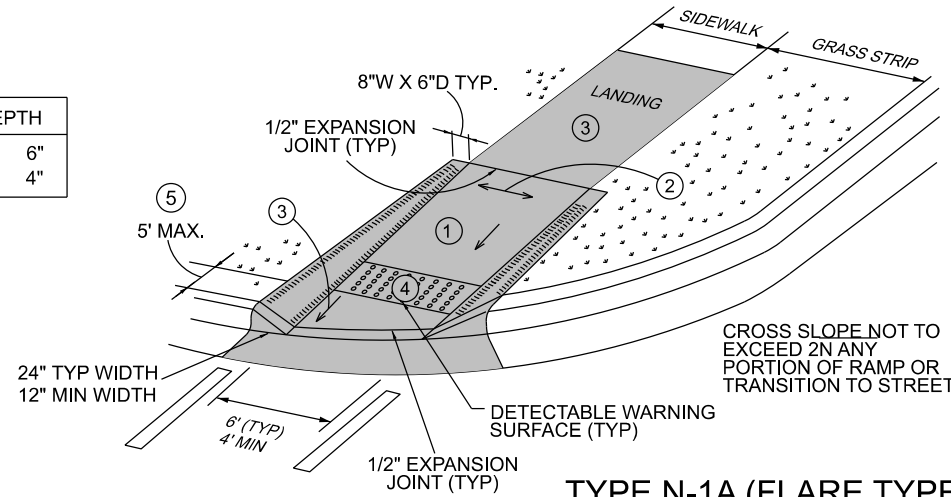


### TYPE N-1 (CURB TYPE)

1. 8.33% (12:1) MAX RAMP SLOPE
2. CROSS SLOPE: 2.00%
3. CURB RAMPS REQUIRE A (4'-0") MINIMUM LANDING WITH A MAXIMUM CROSS SLOPE AND LONGITUDINAL SLOPE OF 2.00% WHERE PEDESTRIANS PERFORM TURNING MANEUVERS. SLOPE TO DRAIN TO CURB.
4. IF LENGTH EXCEEDS 5', TRUNCATED DOMES SHALL BE INSTALLED ALONG THE BACK OF THE CURB COVERING THE FULL WIDTH OF THE RAMP.


### TYPE N-1A (FLARE TYPE)

NOTE: USE SMALL FLARES ONLY WHEN A CURB TYPE DIRECTLY CONFLICTS WITH APPROACHING VEHICULAR TURNING MOVEMENTS.

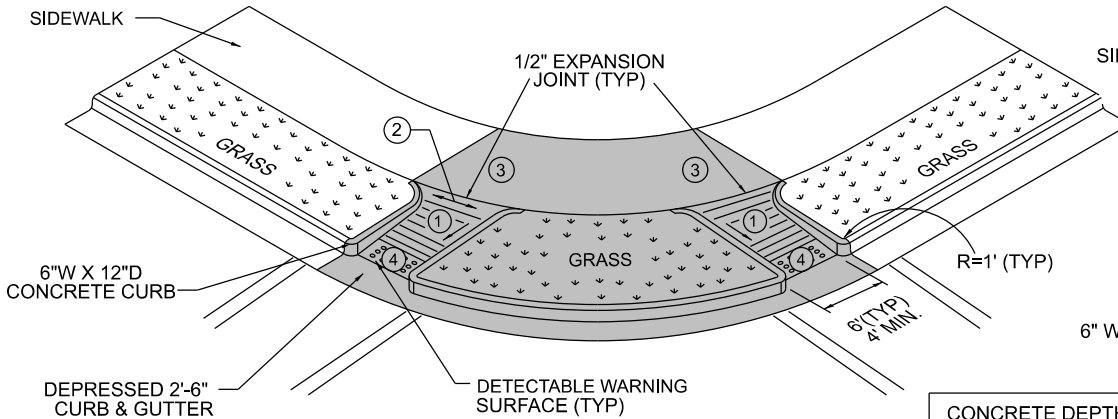


### TYPE N-2 (RADIUS)

CONCRETE DEPTH	
RAMP / FLARE	6"
LANDING	4"

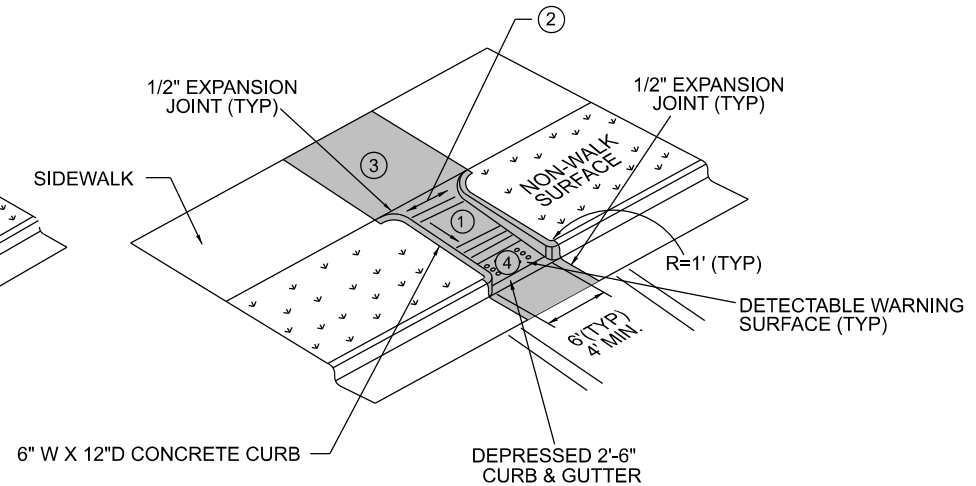

### TYPE N-2 (TEE INTERSECTION)



## CURB RAMPS - NEW DEVELOPMENT

# TOWN OF GARNER, N.C.

DESIGNED BY:	TOG	REVISED	FEB. 2022
APPROVED BY:	CSJ	STD. NO.	T-2.01.2