


PAY LIMITS FOR CURB RAMP

CONCRETE DEPTH	
RAMP / FLARE	6"
LANDING	4"

NOTE: \* USE SMALL FLARE ONLY WHEN A CURB WOULD DIRECTLY CONFLICT WITH APPROACHING VEHICLE TURNING MOVEMENTS.


### TYPE N-3

1. 8.33% (12:1) MAX RAMP SLOPE
2. CROSS SLOPE: 2.00%
3. CURB RAMPS REQUIRE A (4'-0") MINIMUM LANDING WITH A MAXIMUM CROSS SLOPE AND LONGITUDINAL SLOPE OF 2.00% WHERE PEDESTRIANS PERFORM TURNING MANEUVERS. SLOPE TO DRAIN TO CURB.
4. RAMPS AND DOMES SHALL BE INSTALLED THE SAME WIDTH AS THE SIDEWALK.

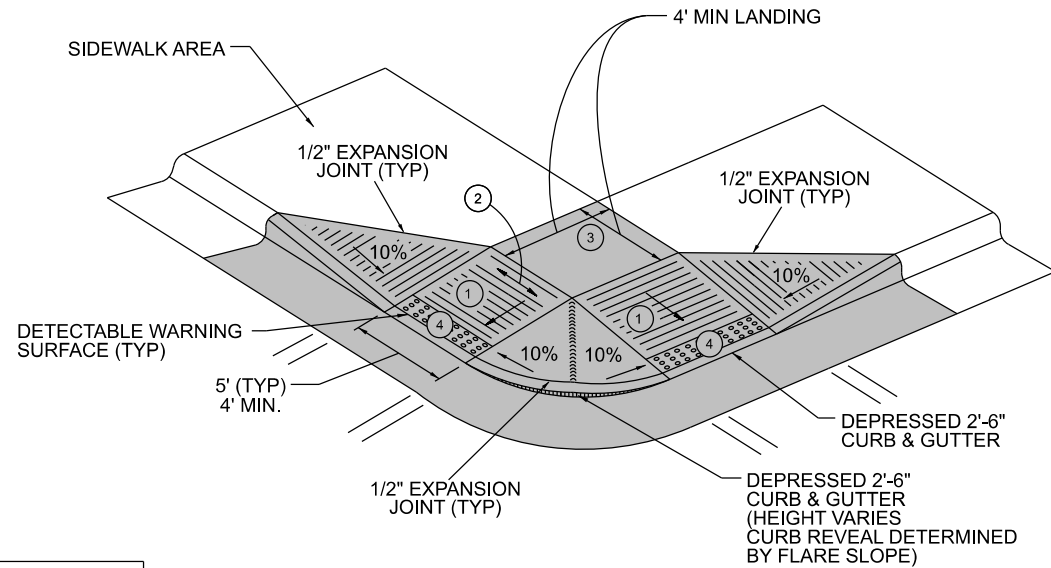

CONCRETE DEPTH	
RAMP / FLARE	6"
LANDING	4"

### TYPE N-3A (COMMERCIAL/RETAIL USE)



CURB RAMPS - NEW DEVELOPMENT

# TOWN OF GARNER, N.C.

DESIGNED BY:	TOG	REVISED	FEB. 2022
APPROVED BY:	CSJ	STD. NO.	T-2.01.4